

6x9 Sunflower / Durango Playhouse

Outdoor Living Today Assembly Manual

Thank you for purchasing a 6x9 Sunflower / Durango Playhouse from Outdoor Living Today. Please take the time to identify all the parts prior to assembly.



Safety Points and Other Considerations

Our products are built for use based on proper installation and normal residential use, on level ground. Please follow the instruction manual when building your Playhouse and retain the manual for future maintenance purposes.

Some of the safety and usage measures you may wish to consider include:

- snow load ratings vary by geographical location. If heavy or wet snowfall occurs, it is advisable to sweep the snow off the roof(s).
- if the product is elevated, any structural and building code requirements are solely the customer's responsibility, and should be abided by.
- in high or gusty wind conditions it is advisable to keep the structure securely grounded.
- have a regular maintenance plan to ensure screws, doors, windows and parts are tight.

Customers agree to hold Outdoor Living Today and any Authorized Dealers free of any liability for improper installation, maintenance and repair of any products sold by Outdoor Living Today.

**Thank you for purchasing one of our 6x9 Sunflowers / Durango Playhouses.
Please take the time to identify all the parts prior to assembly.**

Parts Lists:

A. Floor Section

- 3 - 35"d x 75"w Floor Joist Frames
- 3 - 1 1/2" x 3 1/2" x 72"l Floor Joists
- 2 - 35"d x 75"w Floor Plywood
- 13 - 1"t x 5 1/2"w x 34 7/8"l Deck boards for porch
- 3 - 1 1/2"t x 3 1/2"w x 57" x 48"l Floor Runners
- 1 - 23" long and angle cut. Threshold for Floor and Deck (Opt.)

B. Wall Section

- 4 - 35"w x 60"h Solid Wall Panels (Bottom Wall Plates Unattached)
- 4 - 1 1/2" x 2 1/2" x 35" Bottom Wall Plates
- 3 - 35"w x 60"h Window Wall Panels
- 3 - Window Inserts (Window Insert may or may not be attached)
- 1 - 10" w x 58 1/2"h Narrow Porch Wall Panel
- 1 - 1 1/2" x 2 1/2" x 58 1/2" l Left Side Door Jamb
- 1 - 1 1/2" x 2 1/2" x 35"l Door Header
- 1 - 23"w x 32 1/2"h Bottom Door
- 1 - 23"w x 25"h Top Door

Gable Wall Panels

- 1 - Rear Gable Wall - Triangular Shaped with Designer Shingles
- 1 - Middle Gable Wall - Triangular Shaped with Regular Siding
- 1 - Front Triangular Gusset Gable - Designer Shingles

Top Wall Plates

- 1- 3/4"t x 2 1/2"w Rear Top Plate - Angle cut on end 75" l
- 1 - 3/4"t x 2 1/2"w Front Top Plate -Straight cut on end 70" l
- 4 - 3/4"t x 2 1/2"w Side Top Plate - Angle cut on length -52 1/4" l

C. Rafter and Roof Section

- 18 - 1 1/2" x 2 1/2" x 44 7/8" - Rafters (angle cut & drilled)
- 2 - 3/4" x 3 1/2" x 44"l - Ridge Boards
- 2 - 3/4" x 3 1/2" x 61"l - Ridge Boards
- 2 - 3/4" x 3 1/2" x 10"l - Ridge Board Connectors
- 4 - 1/2"t x 4 1/2"w x 52 1/2"l Soffits (Both Sides)

Roof Panels

- 4 - Outside Roof Panels 41"w (Shingles overhanging roof battens on 1 end)
- 2 - Middle Roof Panel 35"w (Shingles flush with roof battens)

D. Porch Section

- 2- 3 1/2" x 3 1/2" x 58 7/8" long porch posts
- 1- 3 1/2" x 3 1/2" (short) deck post
- 3- Hand Rail Sections
- 2 -1x3 1/2"w x34 1/2"l Top Plate Front Extension
- 1 - 1 x 4 1/2w x 58 7/8"l Front Wall Trim/Supports with 4 1/2"w Filler Strip Attached to back.
- 1 - 1 x 4 1/2w x 58 7/8"l Front Wall Trim/Supports with 2 1/2"w Filler Strip Attached to back.
- 4 - Corner Brackets
- 12 - Post Base Trims - 1/2"t x 3 1/2" x 4"
- 2 - Sheets (35" x 37" x 1/8") for Porch Ceiling

E. Miscellaneous Section

Ridge Caps

- 2 -59 1/2" Roof Ridge Caps

Bottom Skirting

- 4 - 1/2" x4 1/2" x 38"l Front and Rear Bottom Skirting
- 4 - 1/2" x4 1/2" x 52 1/2"l Side Bottom Skirting

Corner & Sidewall Trim

- 7 - 1/2"x 2 1/2"w x 64"l Vertical Corner and Sidewall Trim
- 2 - 1/2" x 2 1/2"w x 60"l Back Wall Filler Trim
- 2 - 1/2" x 4 1/2"w x67" Back Wall Corner Trim
- 1 - 1/2" x 2 1/2"w x 67"l Horizontal Trim above Door and Window Wall
- 1 - 1/2" x 2 1/2"w x 58" Front Wall Porch Trim
- 1 - 1/2" x 2 1/2"w x 58" Front Door Porch Trim

Facia Trim

- 2 - 1/2" x 3 1/2" x 46" long - Back Facia- Angle cut on ends
- 4 - 1/2" x 3 1/2" x 56 3/4" long (Side Facia)
- 2- Front Gusset Facia (Different for Princess and Rascal Models)

Filler Shingles (6" wide)

- 8 pcs 24" long
- 4 pcs 18" long

2- Flower Boxes

1- Pentagon Facia Peak

****Miscellaneous Pieces**

- 1 pc - Spare Wall Siding
- 2 pcs - Spare Shingles- use to shim door, etc



Hardware Package

- 3" Screws
- 2 1/2" Screws
- 2" Screws -
- 1 1/4" Screws -
- 1" Screws for
- 3/4" Silver Screws for Door Hinges (8)
- Finishing Nails -
- 1 - Door Pull Handle (with Hardware Kit)
- 10 - Simpson Strong Tie Roof Connectors

Tools Required:




- Work Gloves and Safety Glasses
- Screw Gun with square drive and star bits
- Level
- 2 Large Ladders
- Hammer

A. Floor Section

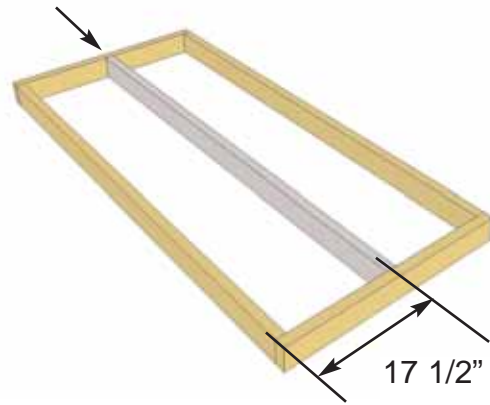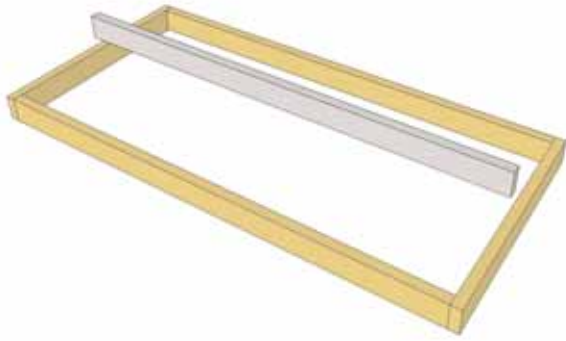


1. Floor Joist Frames require 1 interior Floor Joist attachment. Center Joist (17 1/2") from Outside of Floor Joist Frame to center of Floor Joist and attach with 2 - 2 1/2" screws per end.



2. Lay out **Floor Joist Frames** as illustrated at left.

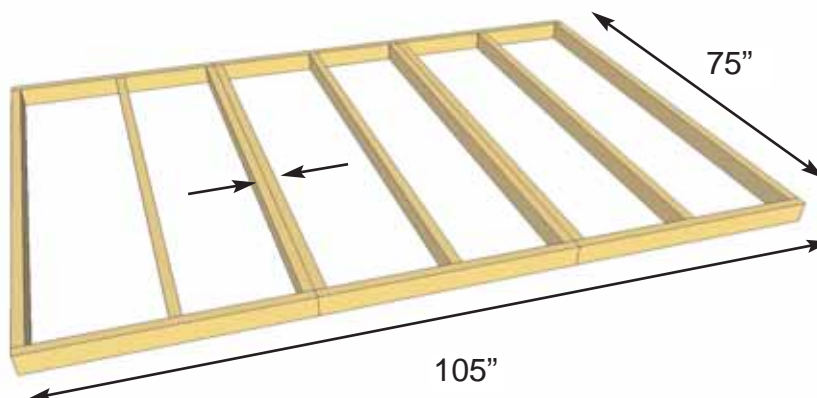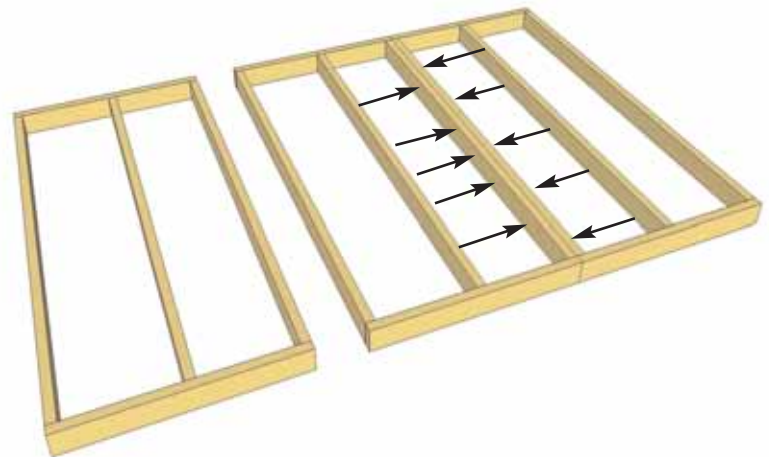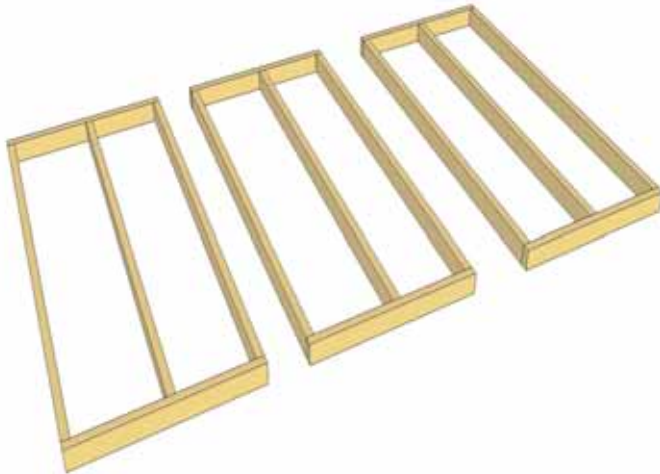

3. Attach the Floor Joist Frames together with 5 - 2 1/2" screws per section. Attached, your floor joist section should be 75" wide x 105" deep.

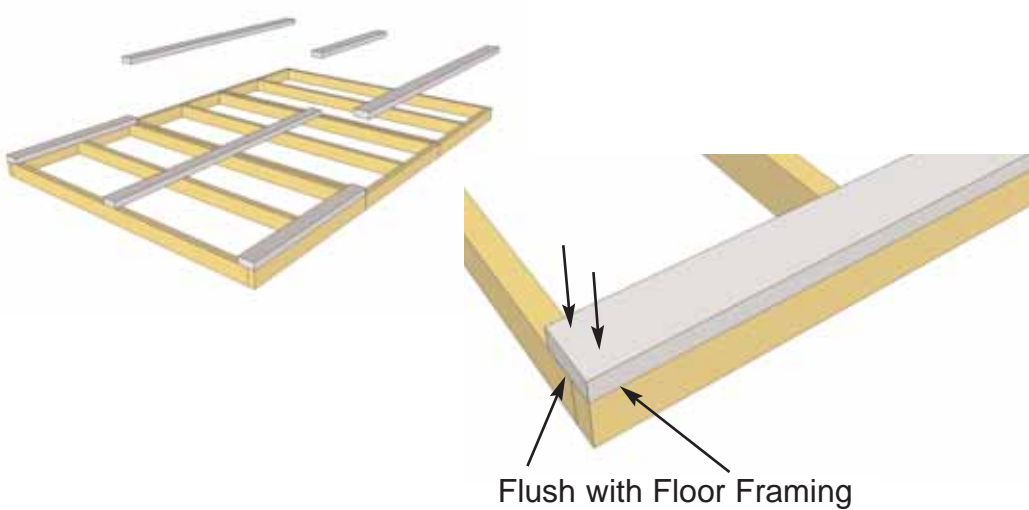



- 4.** Attach **Floor Runners** to completed floor frame. There are 2 Floor Runners per 105" side and 3 completed runners in total. Use 6 - 2 1/2" screws per Runner to secure.

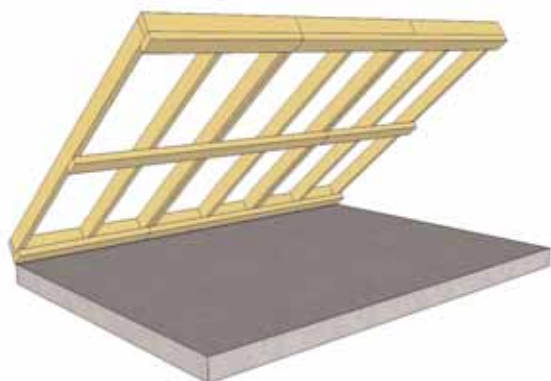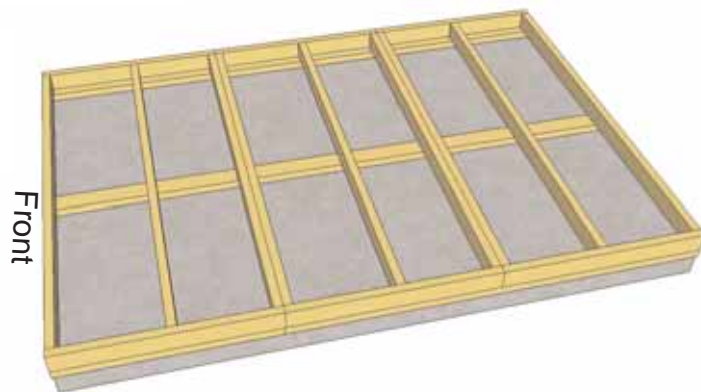



Foundations

Note, the floor will be flipped over and floor runners will sit on your foundation. It is important to note that having a level foundation is critical. Choosing a foundation will vary between regions. Typical foundations can be concrete pads or patio stones positioned underneath the floor runners.


- 5.** With Floor Runners attached, carefully flip the floor over and place on your foundation.
Caution- you will need 2 people to assist you. Be careful when laying floor down not to bend or twist floor. When in place, level floor completely.

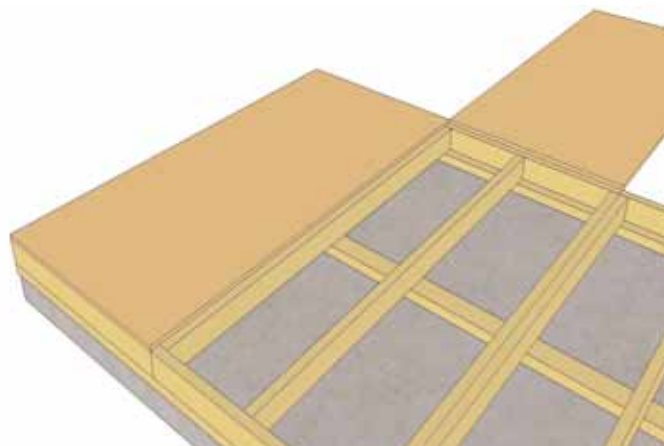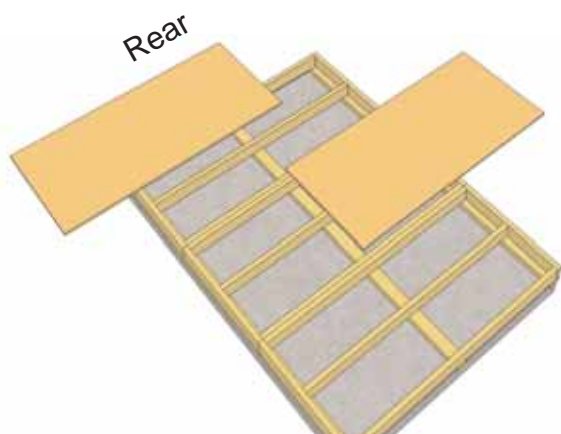

- 6.** Position **Plywood Floor** pieces (2) on top of completed floor joists. Plywood will sit flush with outside of floor joist frame.

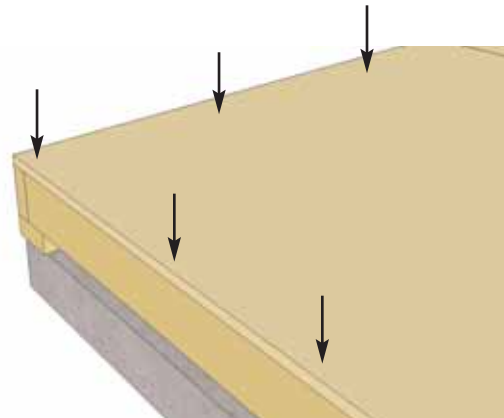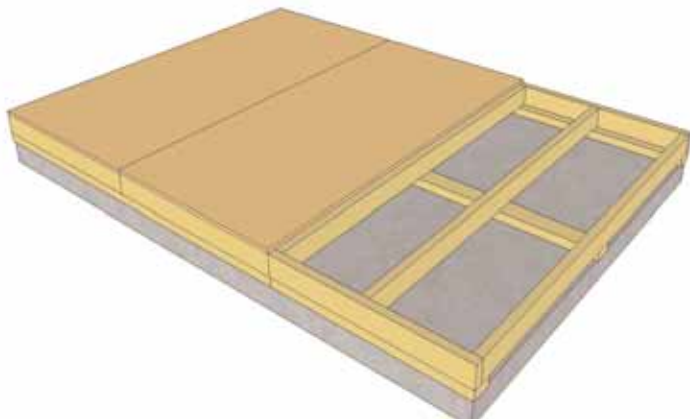

7. When Plywood Floor is correctly positioned, attach with 1 1/4" screws. Use screws every 16".

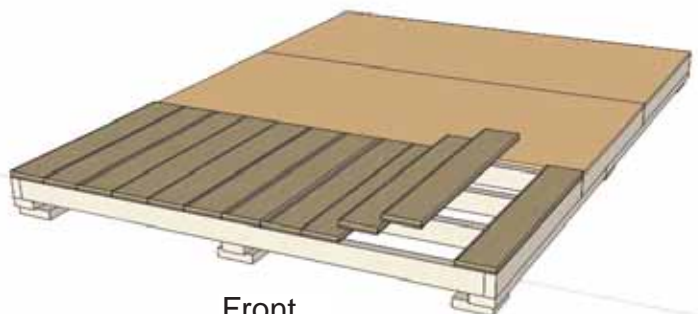

Front



8. Attach 13 pieces of 1x6 **Decking** using 6 - 2 1/4" deck nails per piece. With decking, attach both outside pieces first and equally space all others on the floor before attaching.

Note- When floor is completed, make sure the floor is still level and make adjustments if required. When completed, your floor should look similar to this.

B. Wall Section


9. Lay out all the wall panels and become familiar with their location.

On Standard Kits, there are **3 Window Wall Panels** and **4 Solid Wall Panels**.


All wall panels are 35" wide x 60" high and can be placed in any location except the **Door Panel** (not shown to the left). The Door Panel must be positioned to the left front.

Note- Must attach **Wall Plates** to bottom of all Solid Wall Panels.

Window Inserts for Window walls may need to be positioned and attached as Per **Step 11**.

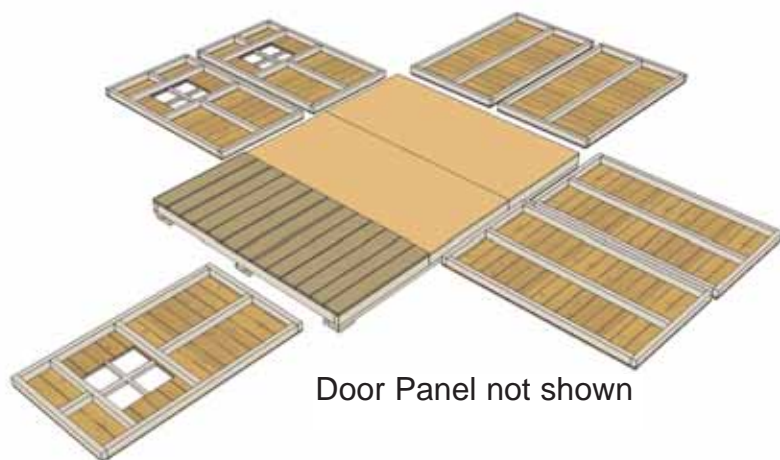


Door Panel not shown

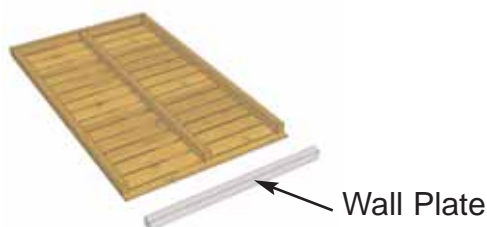

Wall Plate



10. Starting with **Solid Wall Panels**, carefully lay panel face down. Position and attach **Wall Plate** to bottom of wall studs of each wall panel with 6 - 2 1/2" screws. Position so plates are flush with framing.

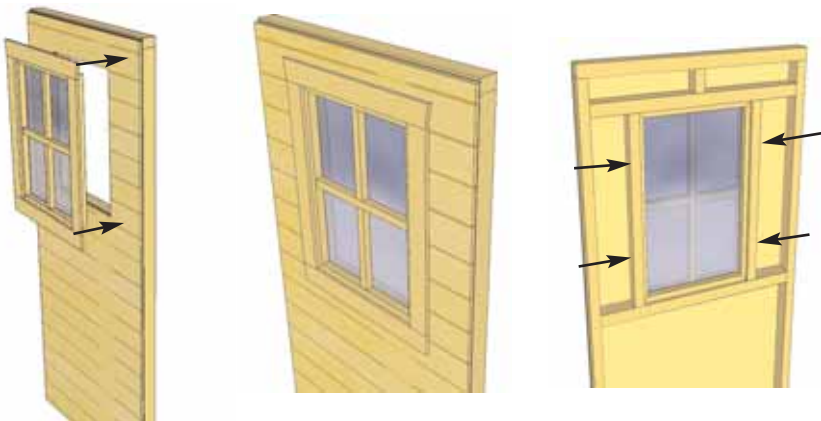

11. Locate **Window Inserts** and place into wall openings. Push so from the outside, window trim sits flush against wall siding. On the inside, shim Window Inserts evenly in cavity. Kits include one additional shingle for shimming of the window. When properly positioned, secure Window Insert to wall framing cavity with 4 - 2" screws. Complete all Windows.


12. Starting at Rear Corner, position a Wall Panel on top of plywood floor. Depending on your preference, you may use a solid or window wall panel in this position. If using a solid wall, make sure panel is facing up.



13. The side wall panels will sit flush at the end of the plywood floor with the front and rear panels sandwiching between them.


Note: Siding will overhang the floor by approx. 1/2"

Position rear corner wall into place and attach together with 3- 2 1/2" screws.

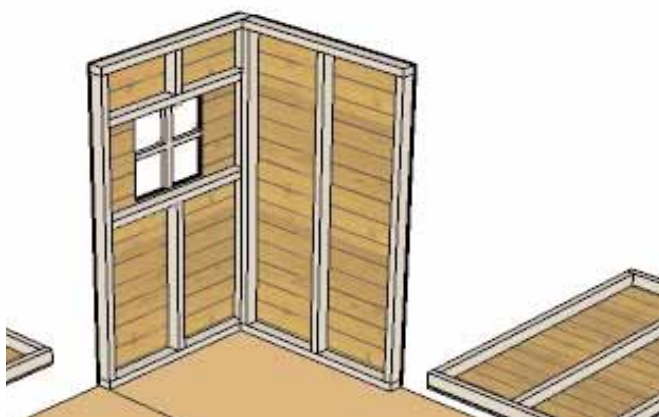


Important:

Make sure all walls are aligned in their upright position. If not, water may leak into your playhouse. Unsure if panel is facing up or down? check siding on window wall panel to match alignment.

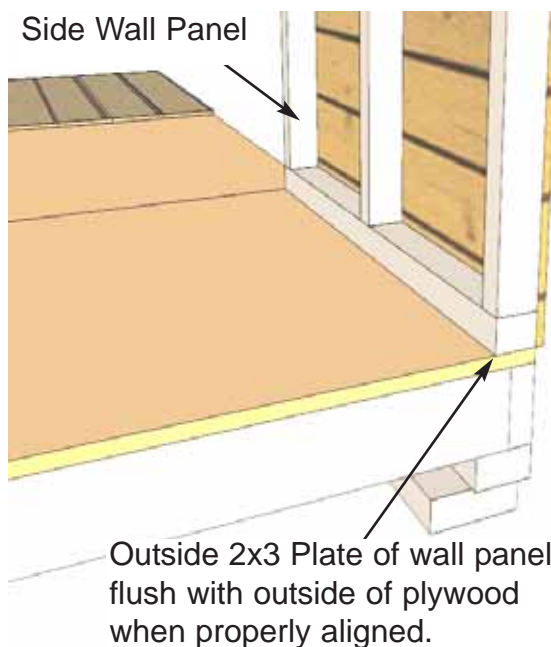



Screw at the top, middle and bottom of 2x3 stud.
Do Not Attach Walls To Floor at this stage.

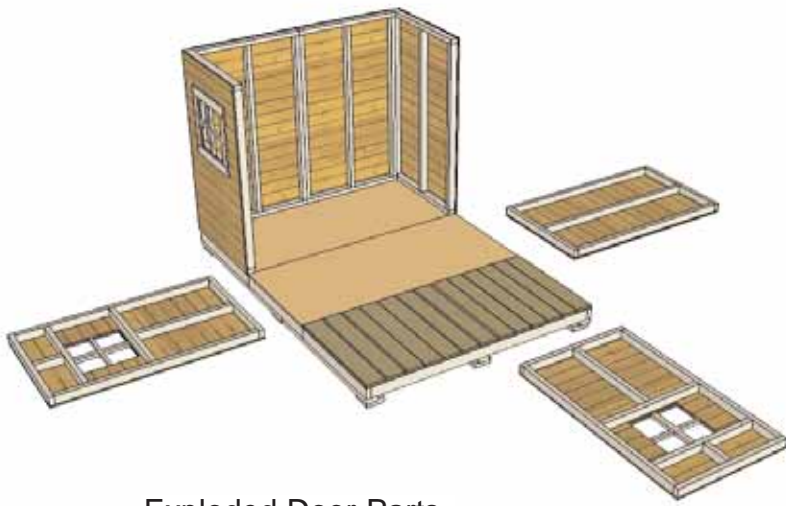


14. Continue to attach walls working your way around the playhouse. Once again, screw walls together using 2 1/2" screws at the top, middle and bottom of wall studs..

15. To attach the door, first position the 10" wide narrow wall next to window wall and screw into adjoining wall stud with 3- 2 1/2" screws.

Exploded Door Parts

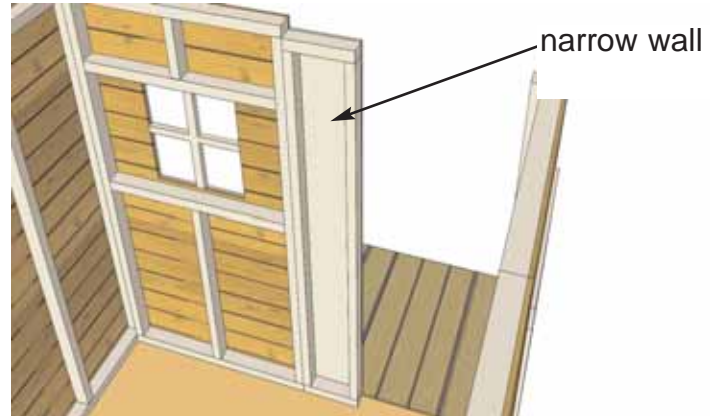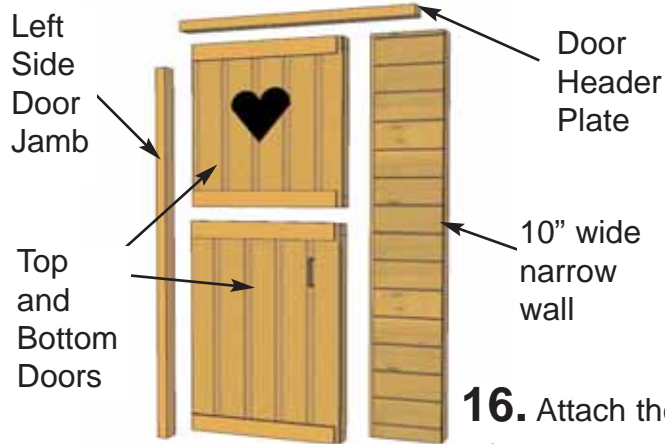

16. Attach the Left Side Door Jamb to left side wall stud. Make sure jamb is flush with floor and flush with existing wall stud. Use 3 - 2 1/2" screws to secure. Next, attach the Door Header Plate to jamb and studs of narrow wall. Use 3 - 2 1/2" screws to secure.

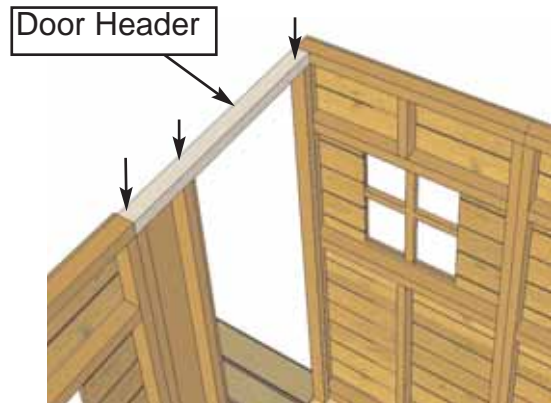


Door Jamb flush to outside edge.



Position the Bottom Door Panel in door opening. Framing of door should be flush with door jamb. Leave a 1/2" gap between floor and bottom door. Attach hinges with - 3/4" Silver Screws for Door Hinges when correctly positioned. Follow same procedure for Top Door leaving 1/4" gap between doors. **Note**, to attach door hardware, follow instructions found in hardware kit. The bottom door has precut slot to accommodate the door handle thumb latch.




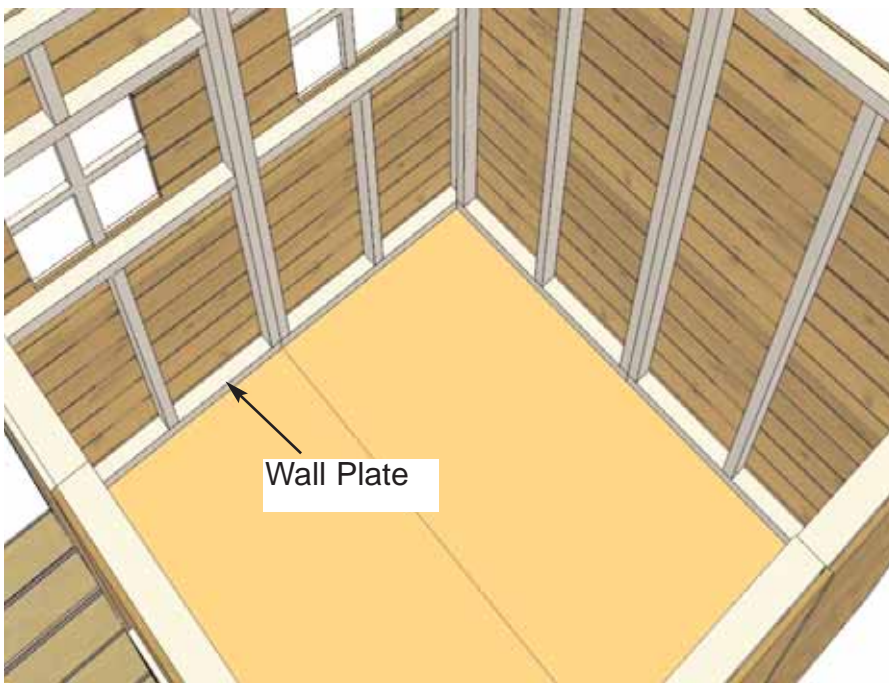


17. When all walls are attached together, check alignment with the floor. Bottom wall plates should sit flush with outside of plywood floor. When positioned correctly, fasten bottom wall plates to floor using 4 - 2 1/2" screws per wall panel.





18. Position angle cut **Rear Top Plate** (rear only) on top of wall studs so it is flush on the inside with 2x3 wall stud. The Rear Top Plate has an angle cut on the ends. Attach by screwing down into top wall plate with 4 -2" screws.

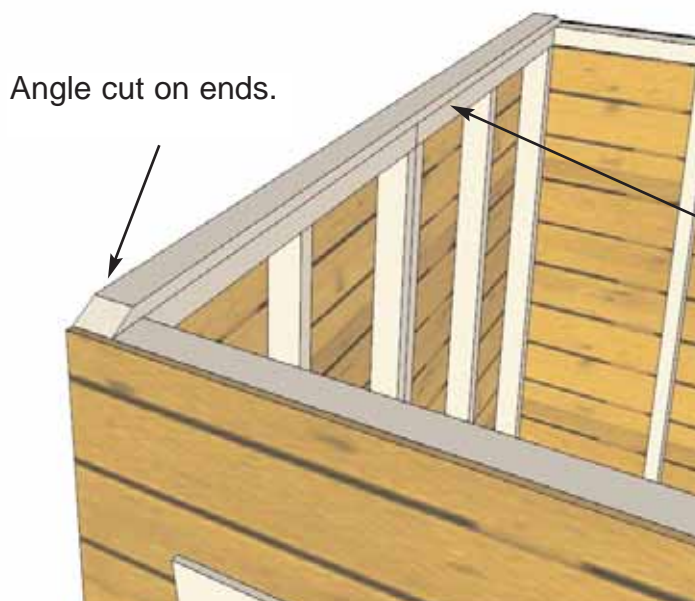

Rear top plate should be flush with inside of wall plate.

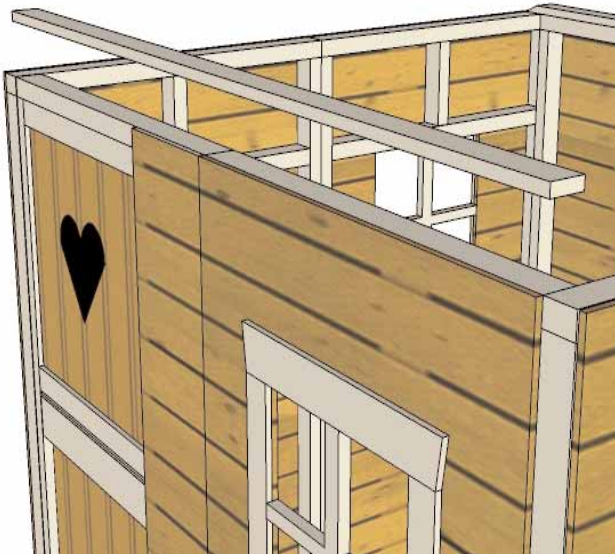

19. Position the Front Top Plate on top of door and front wall panel. Front top plate is straight cut on the ends and is 70" long. Once again, the plate will be flush with inside of top wall plate. Attach with 4 - 2" screws into top door and wall plates.

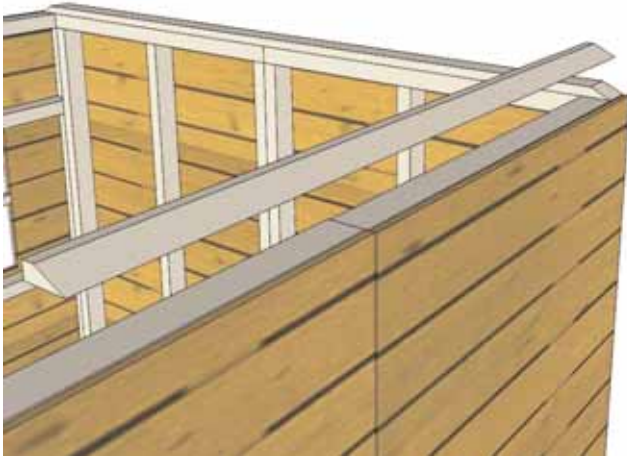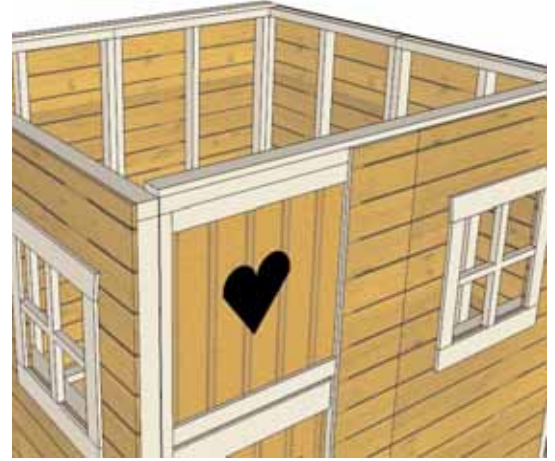

20. Next, attach the 4 Side Top Plates (2 per side). The side top plates are angle cut down the length. Once again, position top plate on wall plate so it is flush with inside of wall plate. Side plate should also be flush with rear wall plate.



When in correct position, screw down plate with 4 - 2" screws per piece.



21. Complete all side top plate attachments as described above.

Caution:

Prior to completing **Step 21**, side top plates will be protruding out from the playhouse, please use caution in the work area and please remove any children who are at eye level with top side plates.



22. To complete the Porch Rail Section, the porch sections must be assembled on level ground first. There are 2 sections. Only the Wall Trims with Filler Strips are different.

A. Attach 1x4 **Top Plate Front Extension (34 1/2"L)** to 4x4 Porch Post with 2 - 1 1/2" screws. Make sure support is flush with post.


B. Attach 1x4 1/2" **Wall Trim** to Front Extension using 2 - 1 1/2" screws. Make sure Front Extension is Flush to back of wall trim and flush to the inside.
Note: there are 2 different wall supports for left & right.

C. Attach both **Corner Brackets** with 2 - 1 1/2" screws from Front Extensions into Brackets. Attach Brackets to Porch posts. Drill Pilot hole in bracket first.

D. Attach **Hand Rail** to complete your Porch Rail Section. Handrail should start 3 1/2" from bottom of post and be centered on Post. On Wall trim side, handrail should sit approx. 1 1/2" in from outside of Wall trim. Use 3 - 1 1/2" screws to attach.

A. Top Plate **Front Extension**

C. Corner Bracket

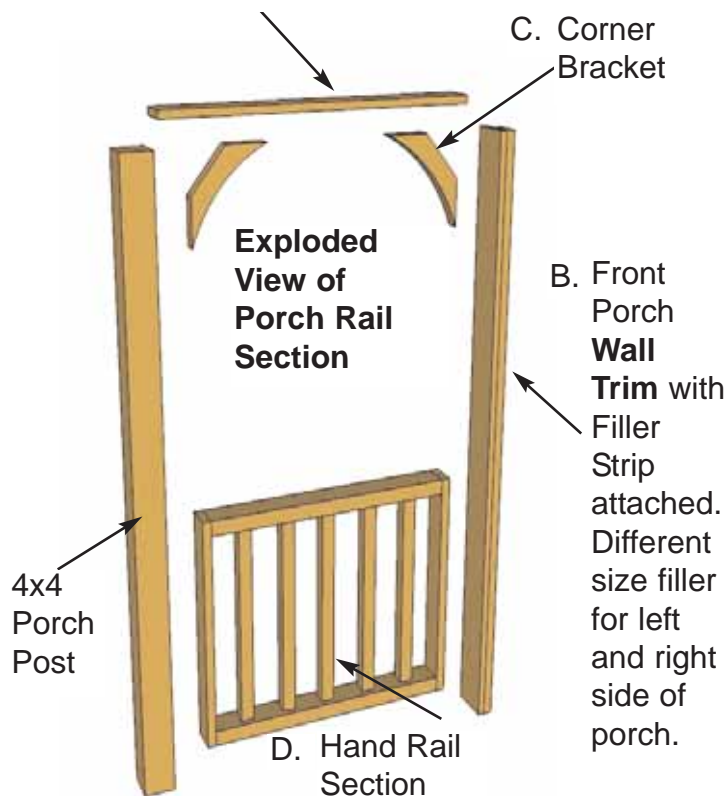

B. Front Porch **Wall Trim** with Filler Strip attached. Different size filler for left and right side of porch.


4x4 Porch Post

D. Hand Rail Section

Rear View of Wall Trim with filler attached.

Important.

Looking from the front, the right side Wall Trim will have the 2 1/2" filler while the left side will have the 4 1/2" filler.

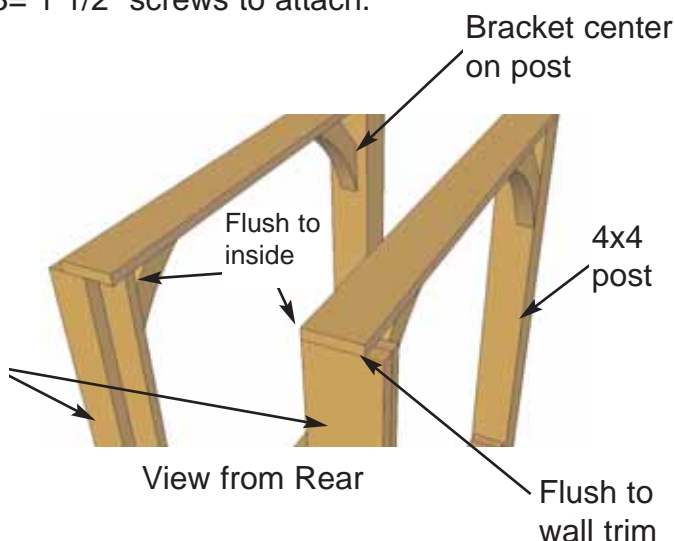


1/2" from Inside

Hand Rail

View right side of porch

1 1/2" from outside on wall support.

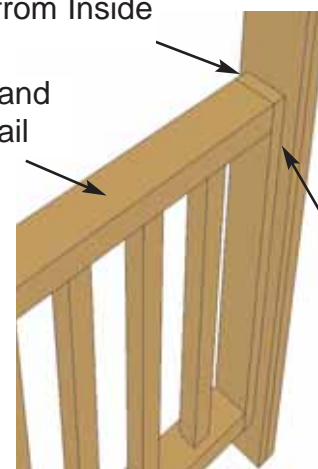

3- 2" screws



23. When both porch sections are completed, lift into place on playhouse deck and beneath the side top plate. (**Right side section will have narrow filler trim**).



Attach wall support to playhouse wall with 3 - 2 1/2" screws. Try to conceal screws if possible. Screw side top plate into porch section with 3 - 2" screws. Screw into corner brackets and post to conceal screws.





Complete the other porch section at this time.


24. Position the **Rear Gable Wall** on top of the Rear Top Plate. The Rear Gable can be distinguished from the other 2 gables because it has designer shingles that protrude past the gable framing at the top.

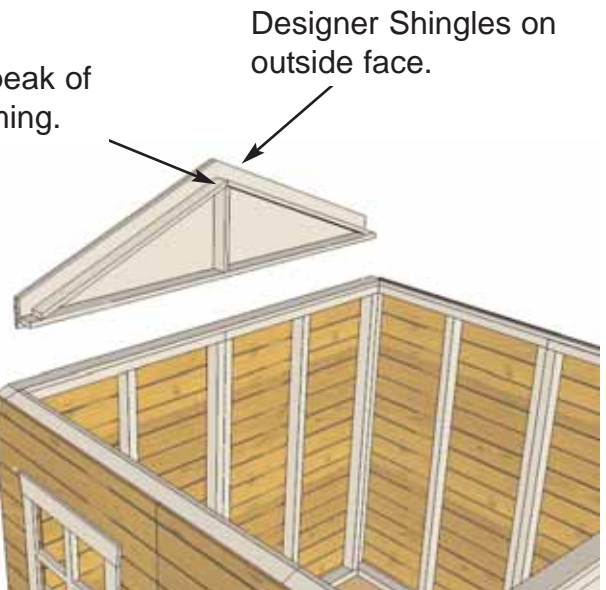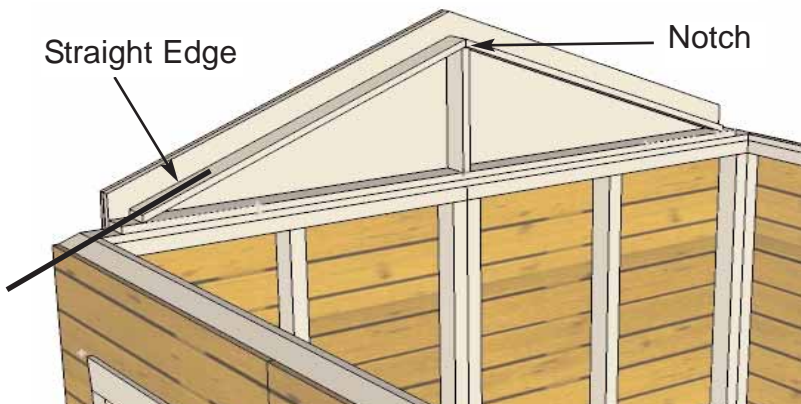

The rear gable framing should sit flush with the inside of the top plate. It should also be centered sideways on the top plate.

Hint: use a straight edge to check the angle of the gable framing and top plate. Both angles should line up. Adjust gable accordingly. Attach with 4 - 2" screws.



25. Position the **Middle Gable Wall** on top of front top plate. Middle gable has cedar siding on the front that is cut flush with gable framing. Once again, the framing of the gable should be flush with outside of plate and be centered sideways on the plate. Gable will also have notch in gable framing at peak.

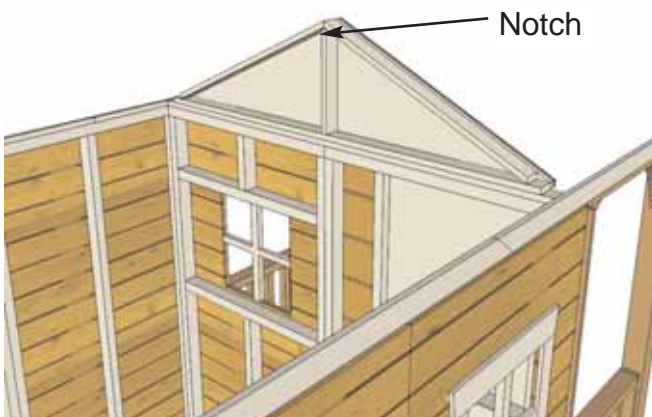

When in correct position, attach with 4 - 2" screws.



C. Rafter and Roof Section

Exploded view of all parts necessary to complete the Roof Section.
Identify all parts prior to starting. (Roof Filler Shingles Missing)

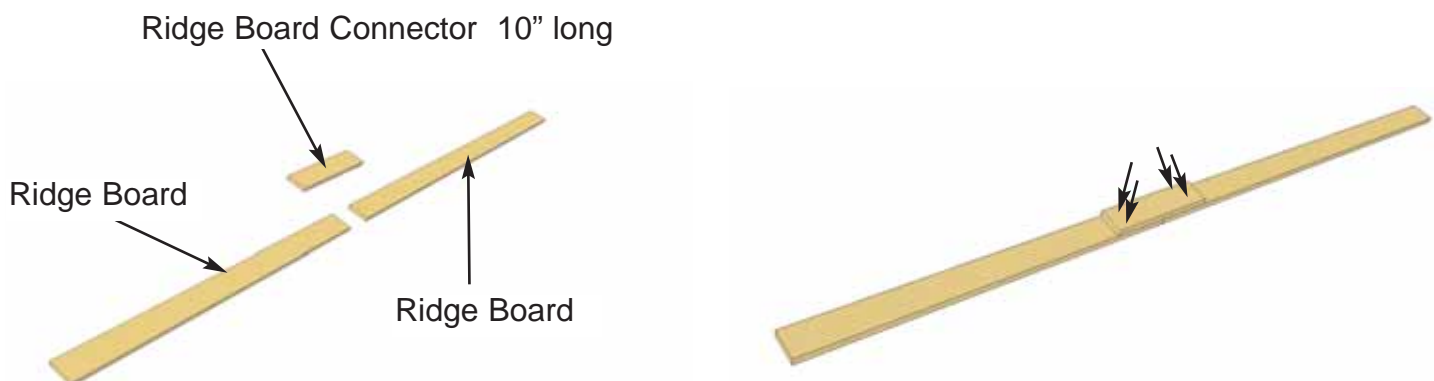
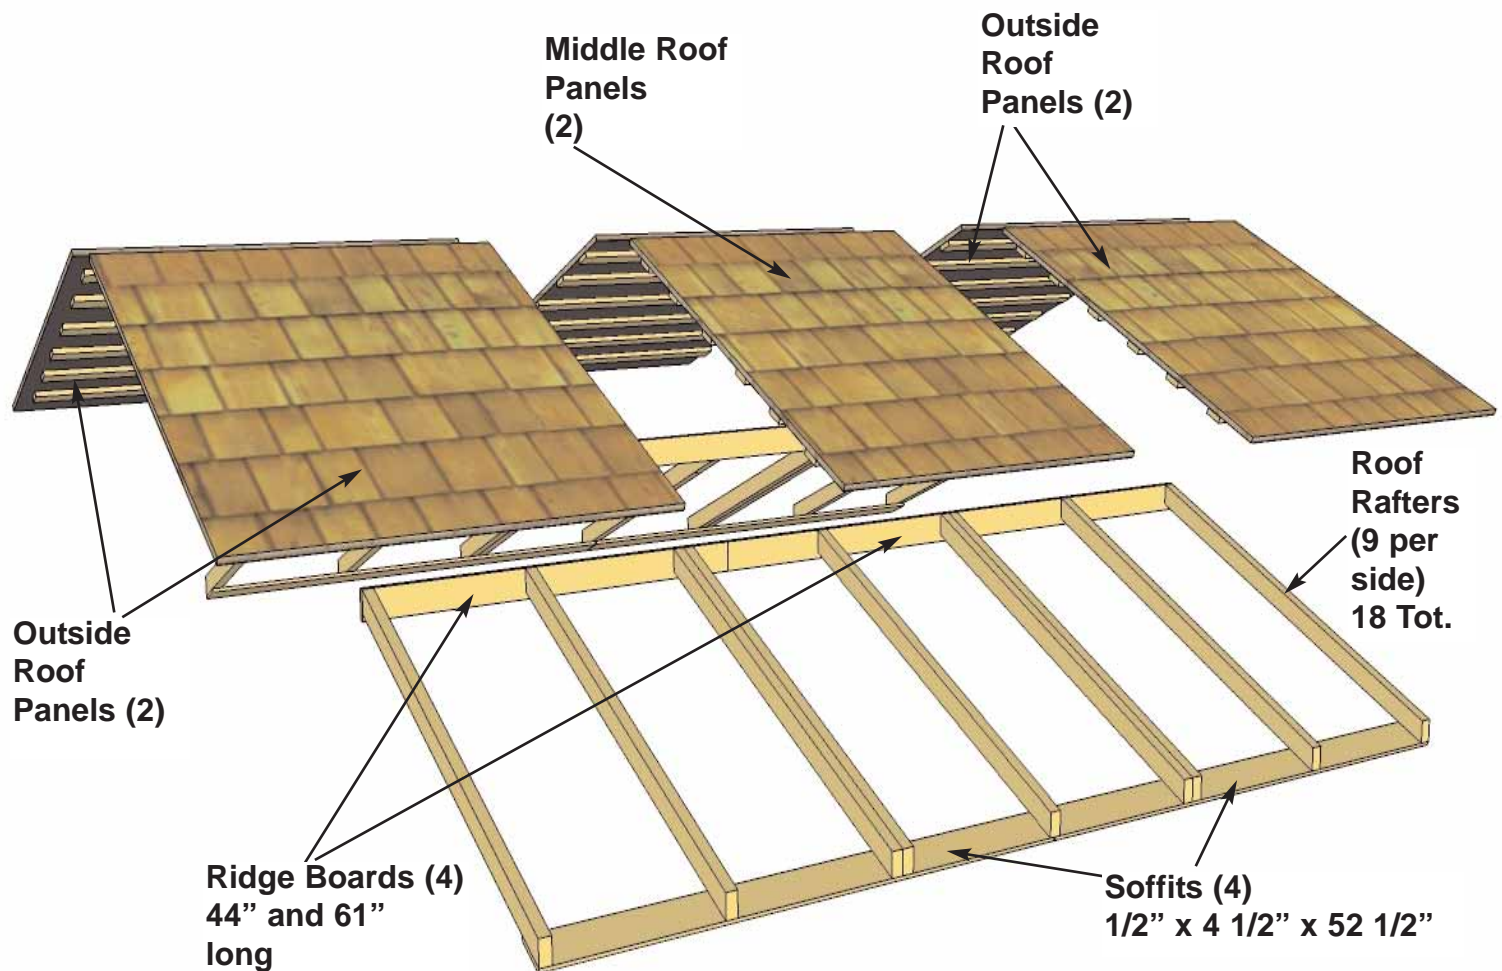


26. Locate (1 each) 3/4" x 3 1/2" x 44" & 61" **Ridge Boards** and attach together with **Ridge Board Connector** using 4 - 1 1/4" screws. Total Length when connected is 105". Complete two Sets.

27. Locate 9 **Rafters**, 2 **Soffits** and completed Ridge Board. Lay out on level ground as shown to the right. Double up Rafters as illustrated.

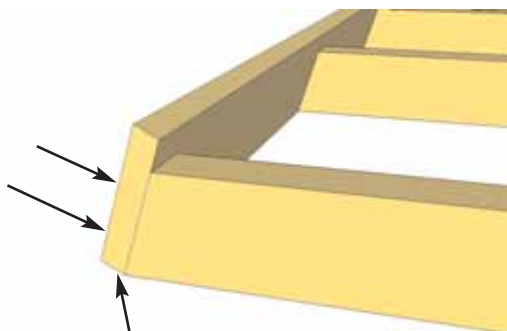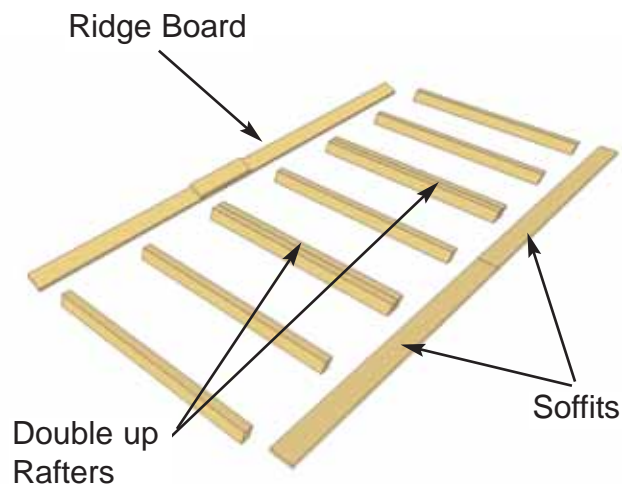


28. Attach completed Ridge Board to ends of both outside rafters with 2 - 1 1/4" screws per end. Measure and position interior Rafters as illustrated below. When positioned correctly, attach Ridge Board to remaining rafters with 2 - 1 1/4" screws /rafter end.

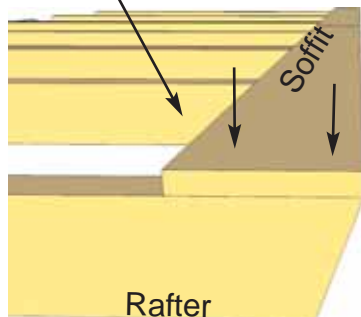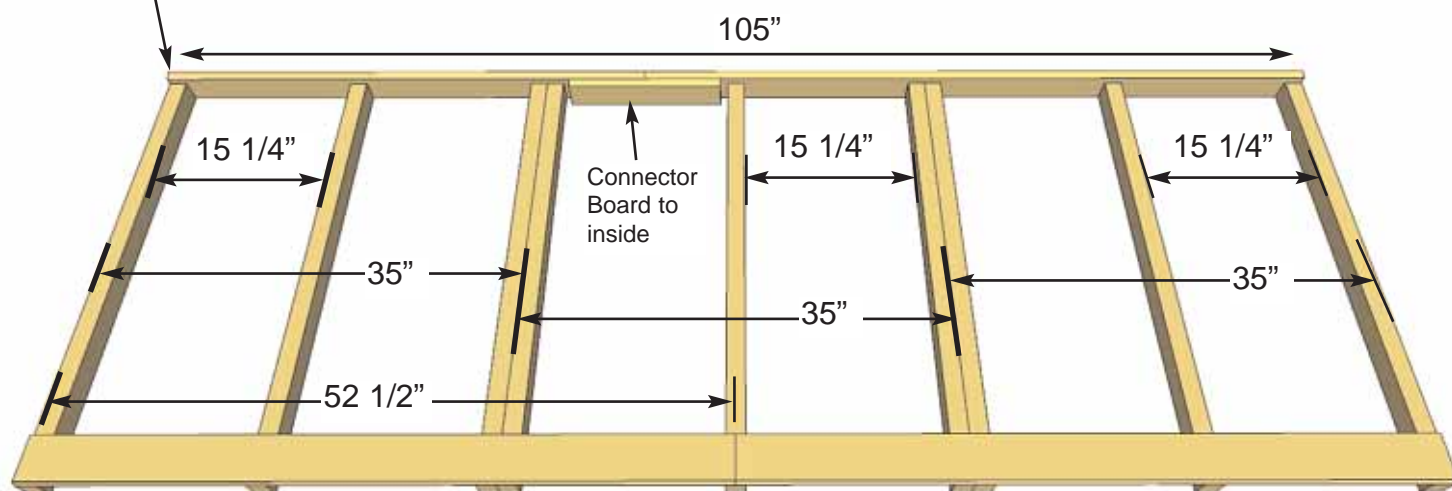


29. Attach end of a 52 1/2" long Soffit Board flush to ends of outside rafters with 2 - 1 1/4" screws per rafter end. Drill pilot hole in Soffit ends to prevent splitting. Complete both outside rafter / Soffit connections first. Measure and position interior Rafters as illustrated above. When positioned correctly, attach Soffits to remaining rafters with 2 - 1 1/4" screws /rafter.

Flip completed rafter section over. Complete 2nd Rafter section now as per **Steps 27 - 28** with the following exception.


When attaching Ridge Board to Rafter ends, make sure Ridge Board Connector is positioned so offset to first Rafter Section. See Step 35 for illustration.

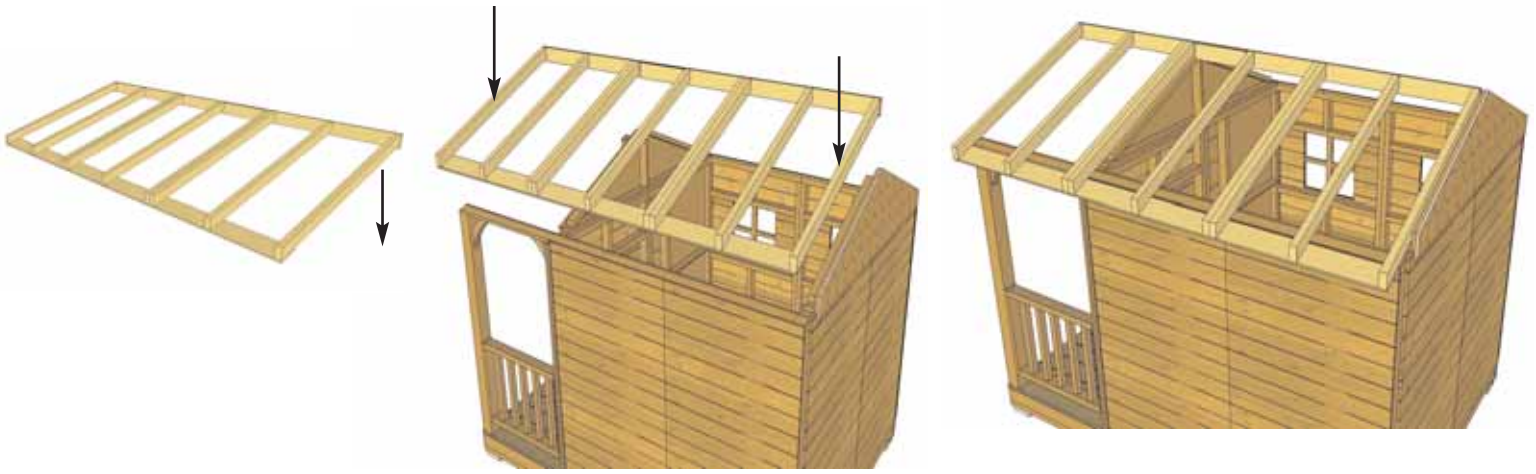

30. Flip Rafter Section over so Soffit is down. Starting with the rear Side, lift completed rafter section up and place on gable framing.

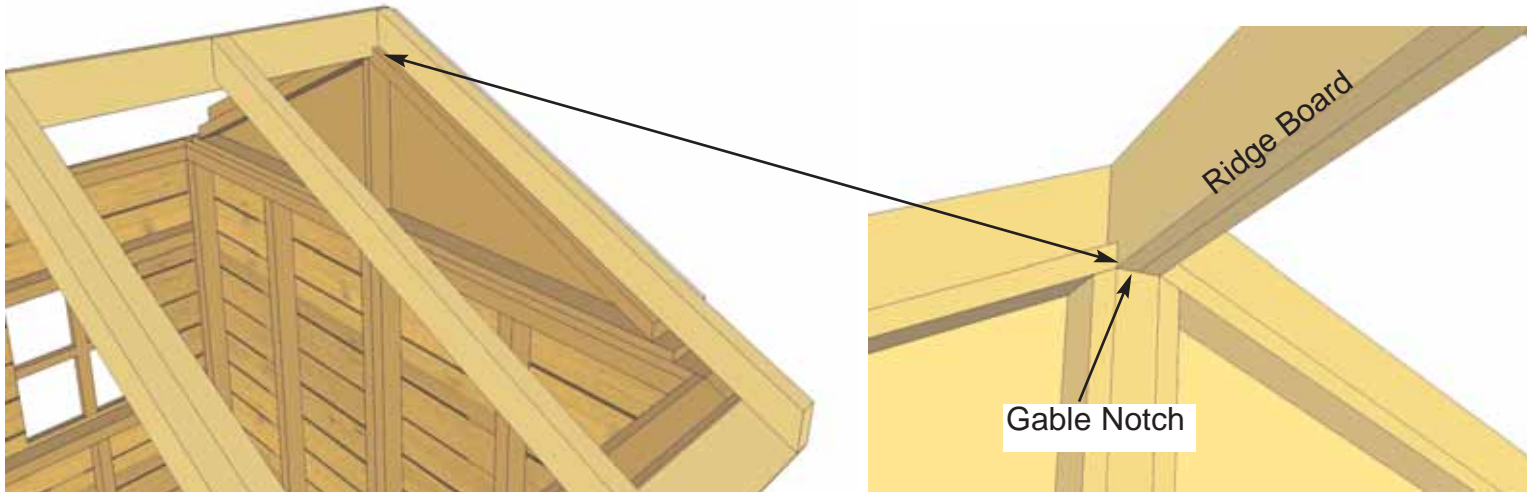

31. Slide Rafter Section up on gable framing until bottom of Ridge Board slips into gable notch.

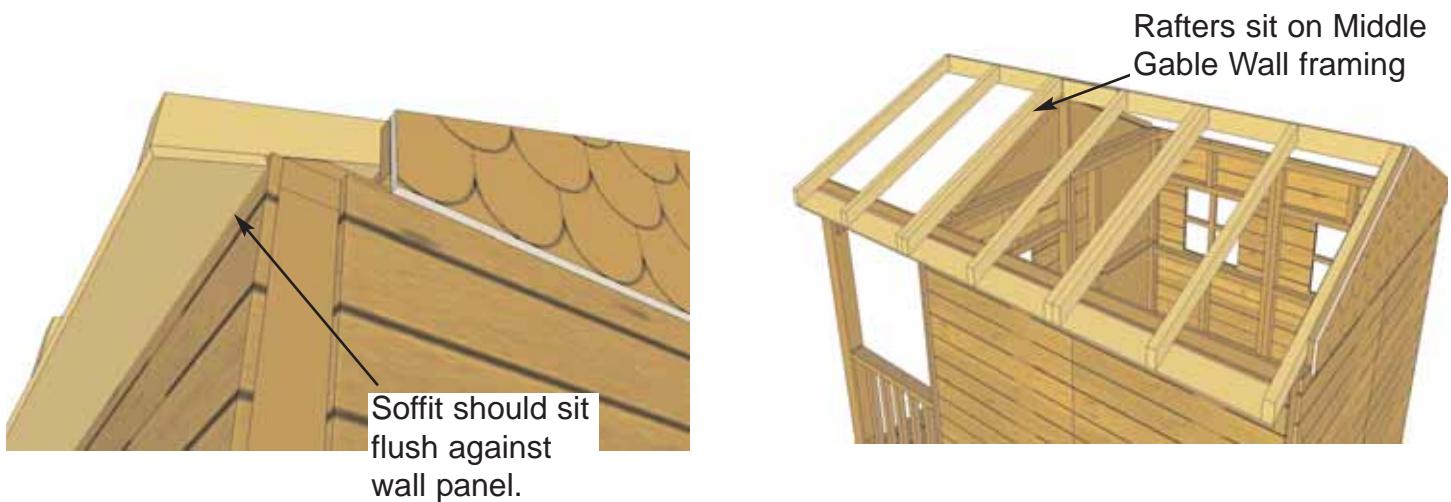


32. Position rafters so they sit evenly on Gable framing from side to side and Soffit sits flush against walls.




33. Rafter will overhang Porch Post when correctly positioned on walls.




34. Place 2nd completed Rafter Section on gable walls and position as per **Steps 31 & 32**.

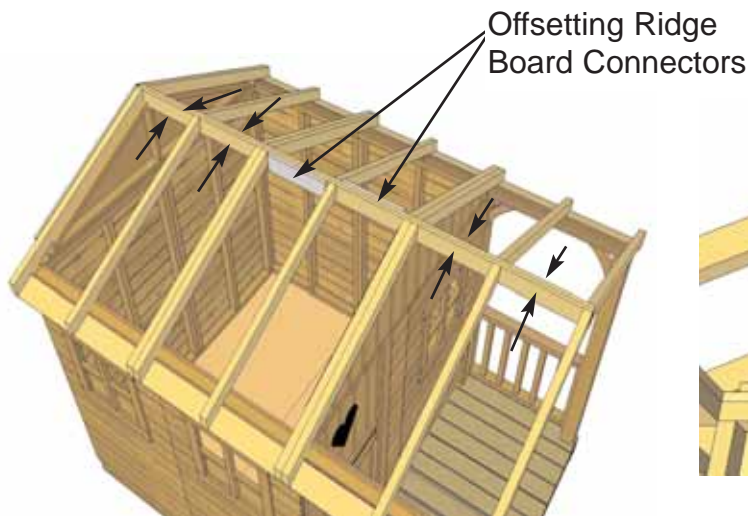


35. At the peak, align Ridge Boards so they are flush together and secure them with 12 - 1 1/4" screws. **Important-** if there is a gap between Ridge Boards, try pushing side walls closer together from outside. Walls should be 70" apart at top from inside of wall plate to wall plate.

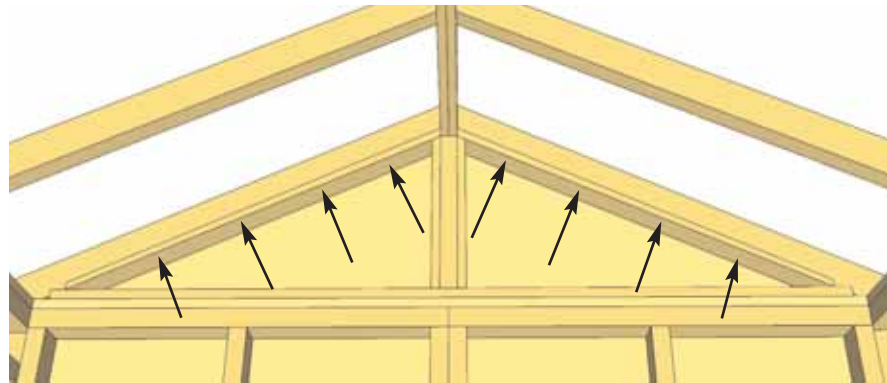

36. With both Rafter Ridge Boards connected. Secure Gable framing to both outside rafters with 8 - 2" screws.

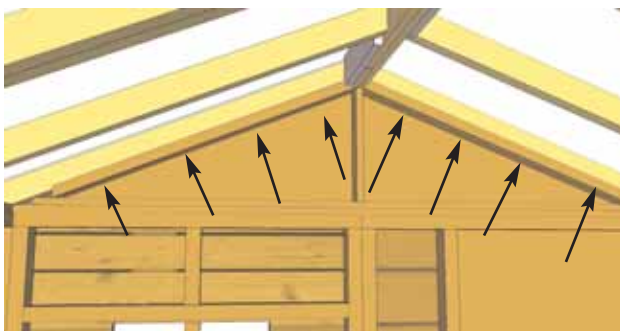

37. Secure Rafters to Middle Gable Wall framing with 8 - 2" screws.

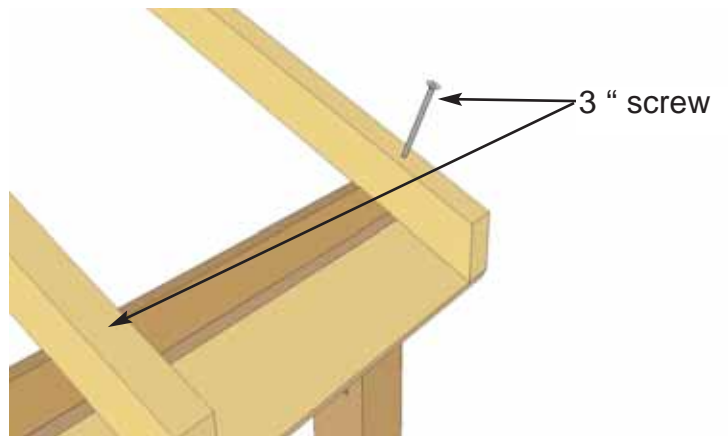


38. Attach Rafters in porch area from the top into top plate of porch with 1 - 3" screw per Rafter. Once again, measure 70" from inside of wall plate to wall plate for correct Rafter alignment prior to attaching.



39. Attach **Simpson Strong Ties** to Top Wall framing and plates and also to the underside of the rafters. Use 4 - 1 1/4" screws to secure. There are 4 Ties per side.

Shingles overhang battens on outside panels.



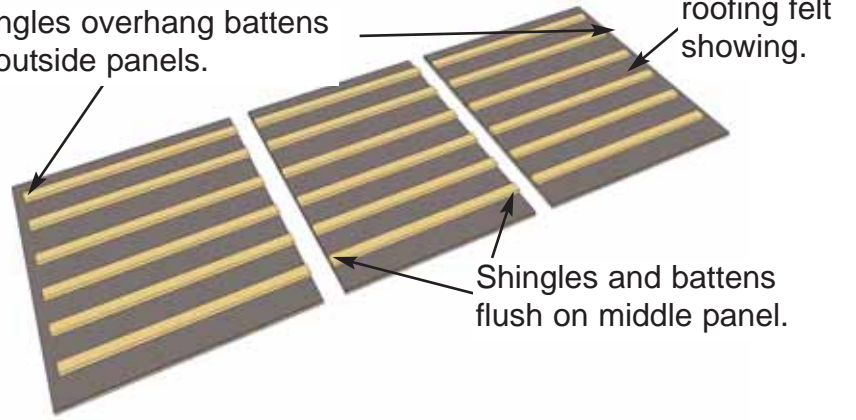


40. Identify all **Roof Panels**. There are 4 Outside and 2 Middle Roof Panels. Outside Panels will have shingles overhanging the battens on 1 end.




41. Lift up and place an Outside Roof Panel on Rafters. Position so it sits flush on 3rd rafter from the outside (doubled up rafter). Lowest batten on roof should be flush with end of rafter at bottom.

Roof Batten flush with rafter end.

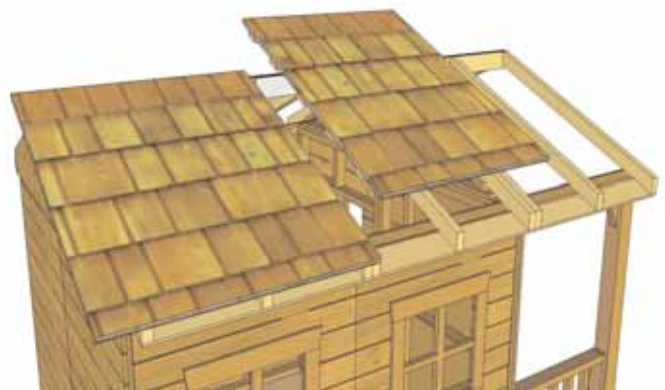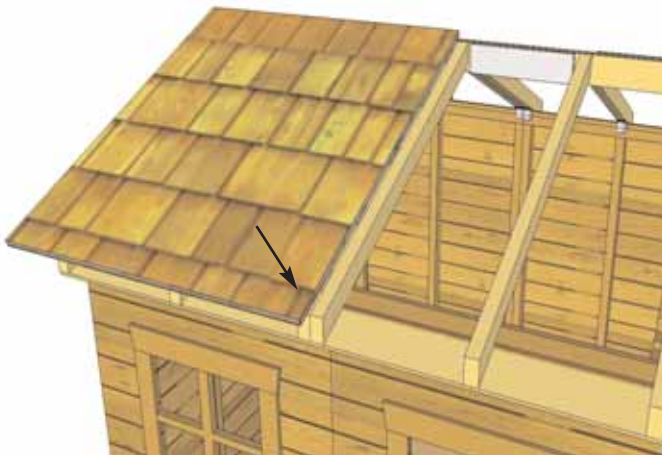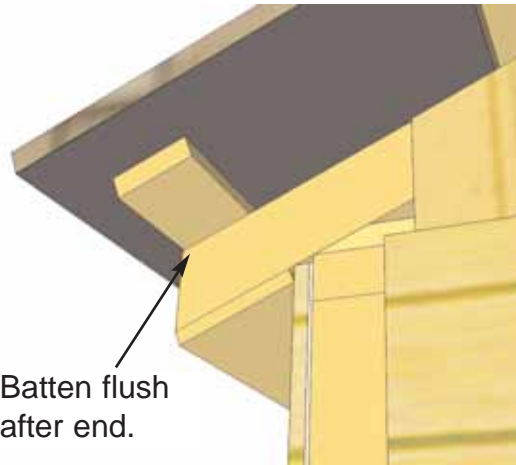

42. When roof is correctly positioned on Rafters, from the outside, screw down through bottom row of shingles into rafter with 1 - 2.5" screw. Locate Middle Roof Panel and position on Rafters.

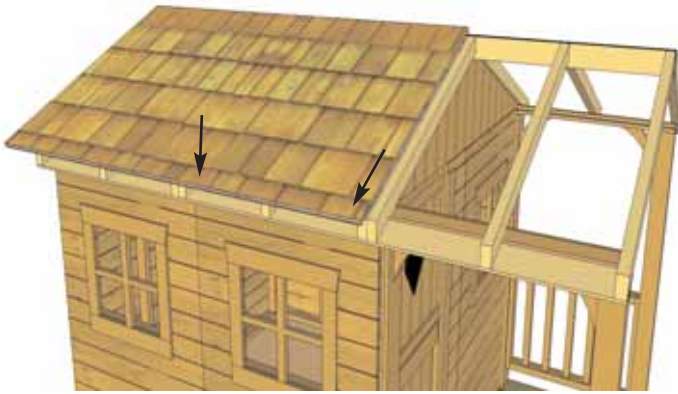



43. To confirm, Middle Roof Panel will have roof battens flush with outside of shingles. Place on middle rafters and aligned panel as per **Step 41** and screw panel down to rafters with 2 - 2.5" screws in the bottom row of shingles.



44. Lift up, position and attach 2nd Outside Roof Panel on Rafters as per **Step 41- 42**. Place opposite rear Outside Roof Panel on Rafters.



45. Position and attach all remaining Roof Panels as per **Steps 41-44**.

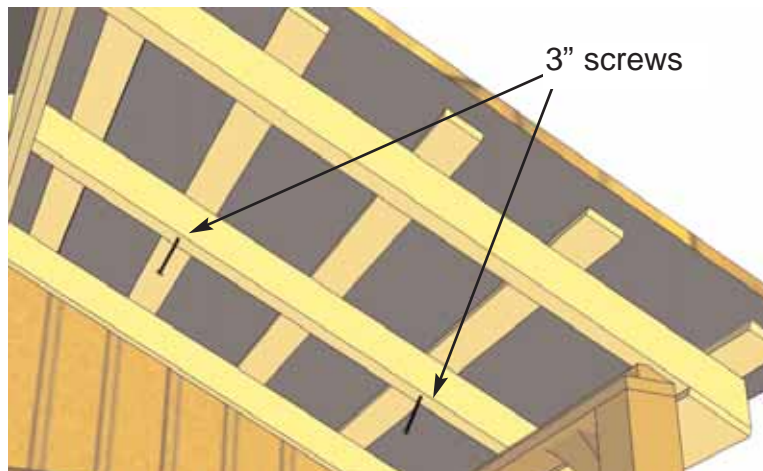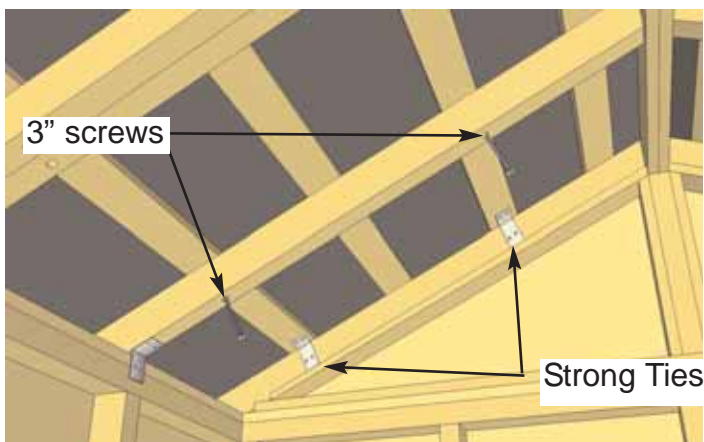

46. To further secure roof panels, from the inside, locate pre-drilled holes in Mid Rafters. Using 2 - 3" screws, secure rafters to roof battens. **Note**, from outside, push roof panel down so batten sit flush against rafter when securing. Also position 2 Simpson Strong Ties on battens and outside rafters and secure 4 - 1 1/4" screws. 8 ties in total. In Porch area, Secure roof to rafters with 2 - 3" screws. **Note-** Simpson Strong Ties not required.



47. Roof **Filler Shingles** are included to cover roof seams. Starting at the bottom, slide the first 24" long shingle in until flush with other bottom shingles. **DO NOT ATTACH UNTIL STEP 48.**



48. Screw first filler shingle down to rafters using 1 - 2 1/2" screw per panel. Make sure to screw into rafter.



49. Slide in another filler shingle and attach as per **Step 48**. On your last row of shingles, the filler shingle is precut to fit properly. Attach to roof with 2 finishing nails per shingle.



50. Attaching the Gable Gusset is next, screw 90 degree Simpson Strong Ties up into 3rd batten of roof panel with 2-1" screws flush to end of batten. (see pictures)

Place **Decorative Gusset Gable** underneath porch roof so peaks line up. Lift up underneath Gusset Gable till seams meet. Mount with 2- 1" screws into each Strong Tie.




Attach 90 degree Simpson Strong Tie here



Note - Gable Facia may be slightly different on certain models. Follow same procedure however.



51. Drill pilot hole through top corner of **Gable Facia**, and attach to plywood board with a 1" screw. Note, end of gable facia will attach to side facia on Step 40. Do a dry run to determine best fit.

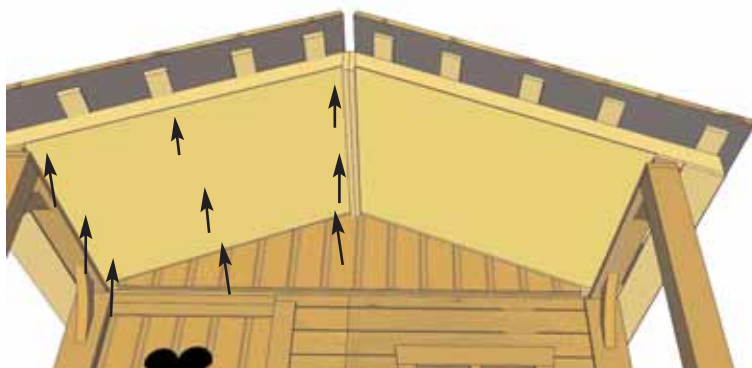

52. Position Porch Veneer so flush with front Rafter and Ridge Board. When correctly in place, nail veneer to rafters with 9 finishing nails. Complete both sides.



D. Porch Section

53. To complete your porch, attach front **Porch Rail Section** to Short Deck Post and position on Deck. Screw completed front porch section to porch post with 3 - 1 1/2" screws.

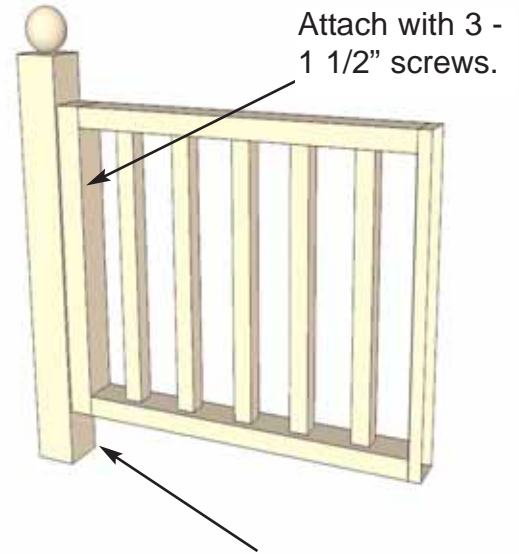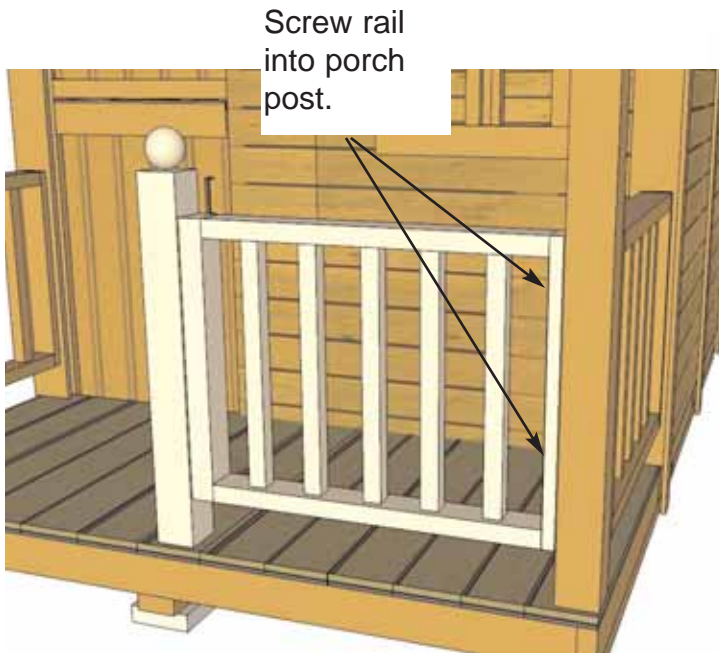

Measure 3 1/2" from bottom of post to align rail. Attach rail to post with 3 - 1 1/2" screws.


54. Toe-nail all porch posts to floor with 2 - 2 1/2 screws per post. Drill pilot holes to avoid splitting posts.

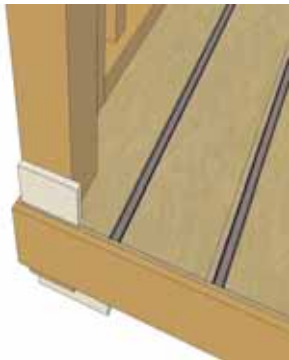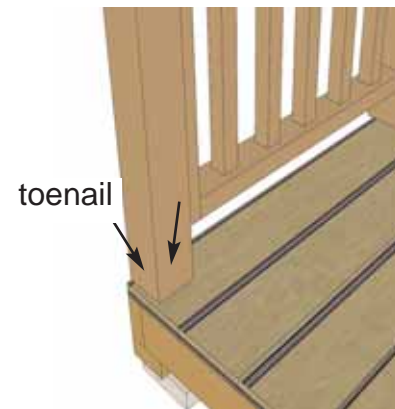

54. Attach **Post Base Trims** to bottom of porch posts. Attach with 1 1/2" finishing nails.




E. Miscellaneous Section

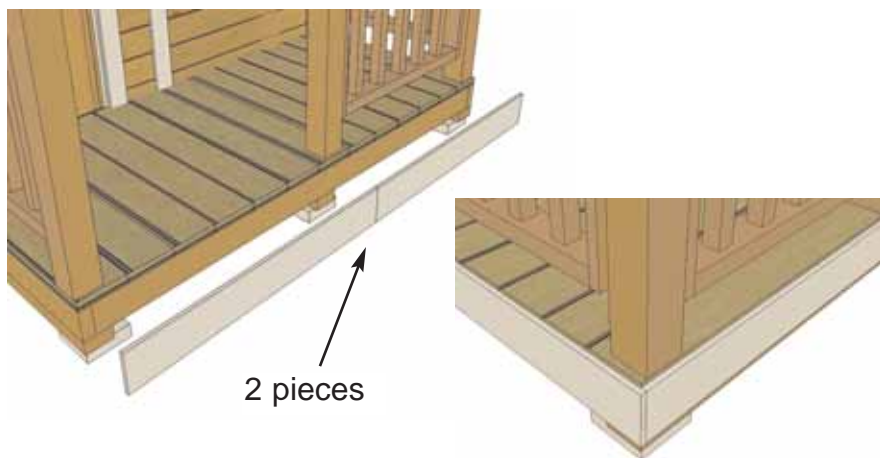

56. Attach **Bottom Skirting** around the base of the playhouse. The front & rear skirting pieces will overlap the side skirting. There are 2 pieces of skirting pieces per side. Attach with 3- 1 1/2" screws per piece.




57. Attach all **Vertical Corner and Sidewall Trims** (7 - 1/2" x 2 1/2"w x 64" l). Trims will cover all wall seams. Use 6 - 1 1/2" finishing nails per piece.

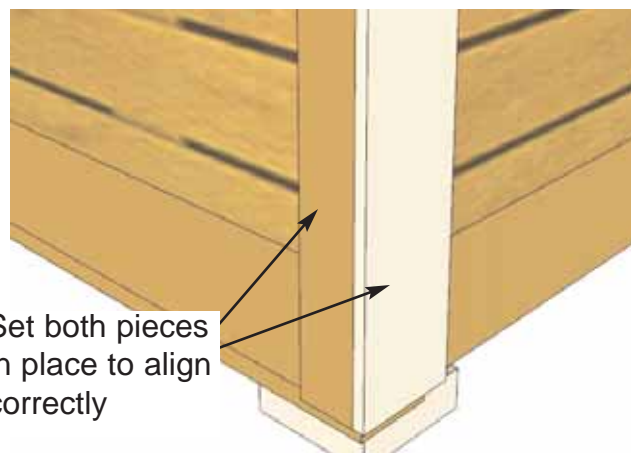

Set both pieces in place to align correctly

58. Attach **Back Wall Corner Trim** (4 1/2" wide) over filler trim. Use 6- 1 1/2" finishing nails per piece.

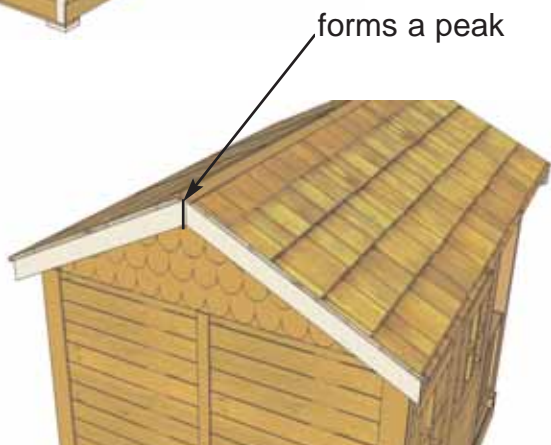


59. Attach **Back Facia** (angle cut on ends) to rear roof panel battens. Line facia up to form a peak and attach to battens with 3 - 1 1/2" screws per piece.




60. Attach **Side Facia** to roof rafter ends. There are 2 side facia pieces per side. Secure with 4 - 1 1/2" finishing nails per piece. At the rear, butt up to Back Facia.

Ridge Cap (showing felt)

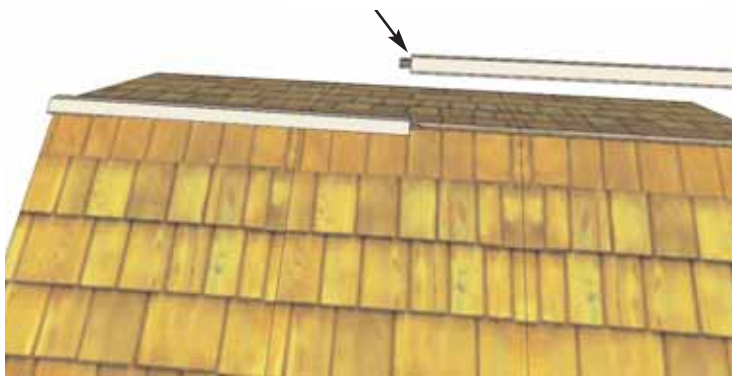


61. On top of the roof, position the 2 **Roof Ridge Caps** on roof peak. Roofing Felt on Ridge Cap overlaps at center. Note, Ridge Cap will overhang the roof shingles equally on both ends.

Attach to roof with 3 - 2 1/2" screws per piece

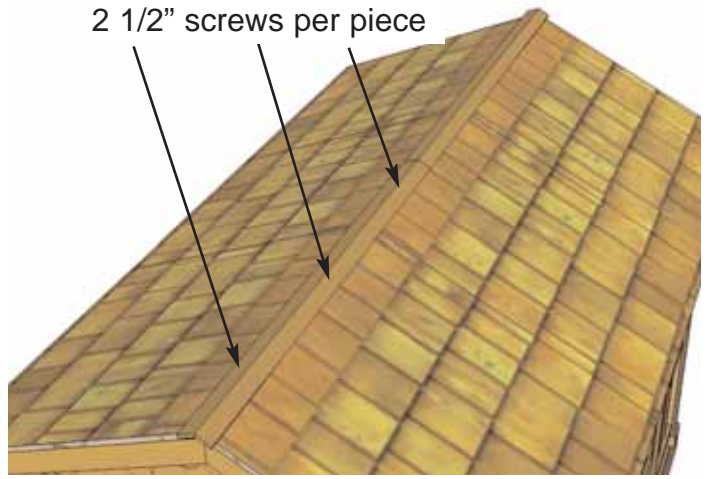


When securing Ridge Caps, place 3" screws so they attach into rafters. Watch for screws penetrating to the interior and being exposed.

Back Facia

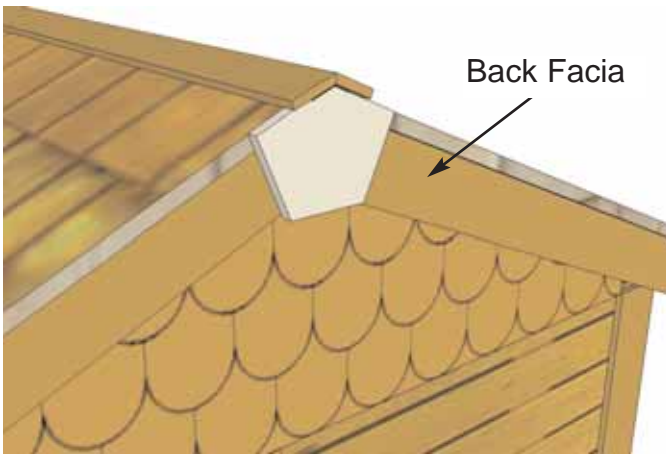


62. Attach **Pentagon Facia Peak** to Back Facia with 4 - finishing nails. Facia Peak will cover any gaps existing where facia's come together at peak.

2- 2" screws

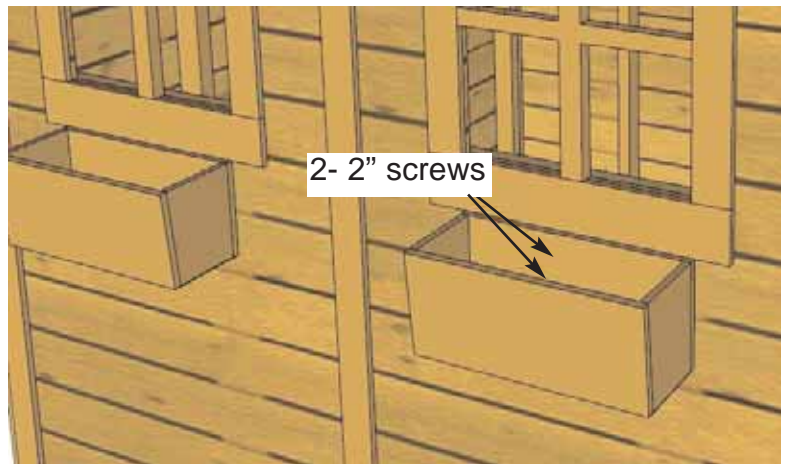


63. Attach **Window Boxes** below bottom of window trim with 2 - 2" screw per box. Screw from inside of box into the center wall stud. Attach second screw 2" below top screw.



1 1/2" screws

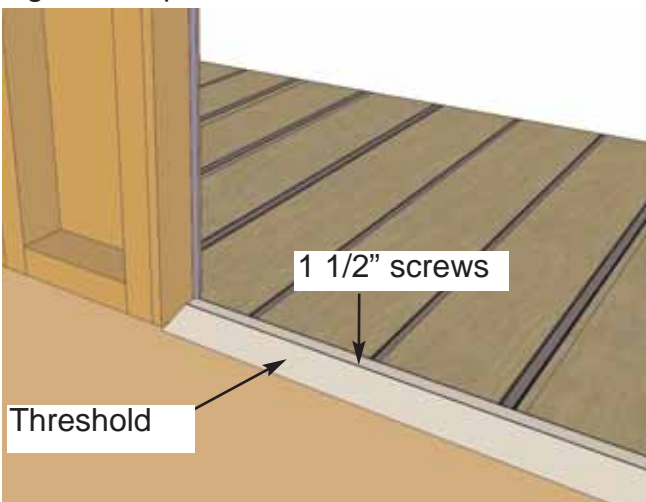

64. Included also as an optional **Doorway Threshold** piece that is 23" long and angle cut. Attach where plywood floor and decking meet under the door with 3 - 1 1/2" screws.

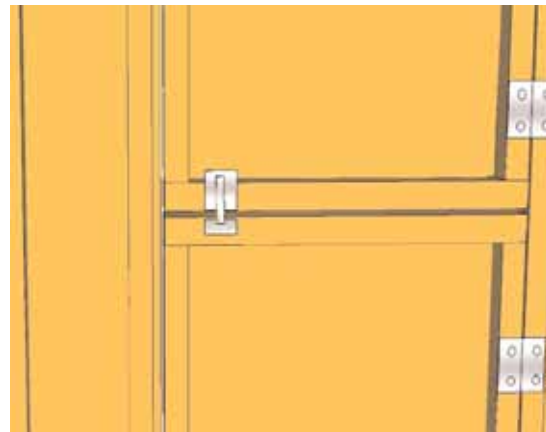

65. On inside of Playhouse, attach the **Barrel Bolt** to Dutch Door. Use hardware supplied in Barrel Bolt package.

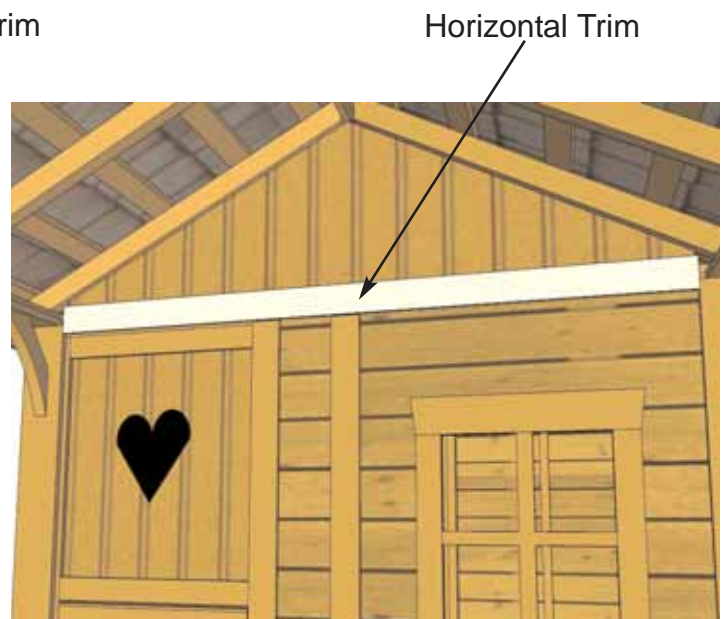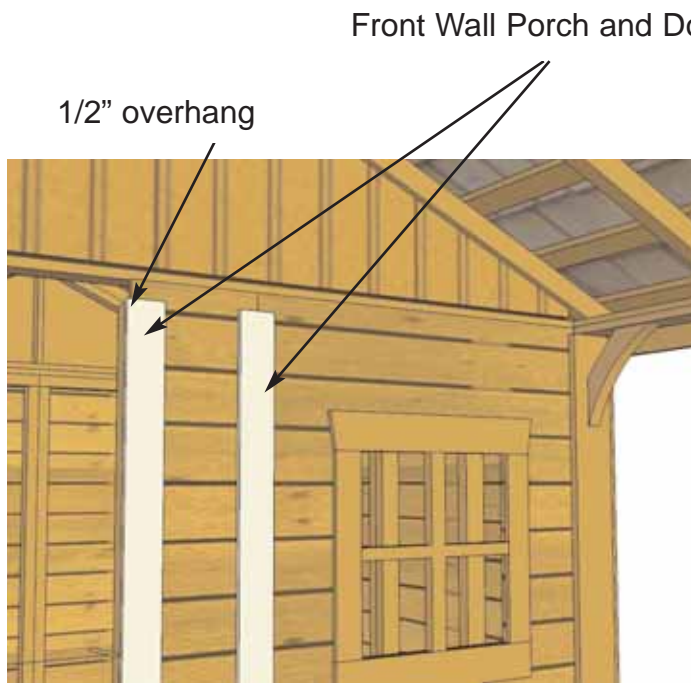

66. Finally, to finish your Playhouse, attach the **Front Wall Porch Trim** and **Door Trim** (58" long vertically). Both trim pieces will be positioned flush to the floor. The Door Trim will overhang doorway by 1/2" and also act as a door stop. Attach with 6 - 1 1/2" finishing nails per piece.

Finally, attach the **Horizontal Trim** (67" long) above the door and window flush to the top of the porch trim. Use 6 - 1 1/2" finishing nails to secure into the gable.

Congratulations and thanks for purchasing one of our 6x9 Playhouses!

Note; Our Playhouse is shipped as an unfinished product. If exposed to the elements, the western red cedar lumber will weather to a silvery-gray color. If you prefer to keep the cedar lumber looking closer to the original color, we suggest that you treat the wood with a good oil base wood stain. You may also wish to paint your new shed rather than stain it. In both cases we recommend that you consult with your local paint and stain dealer in your local area for their recommendations.

If you have any questions, comments or suggestions about your Playhouse, please contact our customer support line @ 1-888-658-1658 or email us at sales@outdoorlivingtoday.com

Thanks again!